
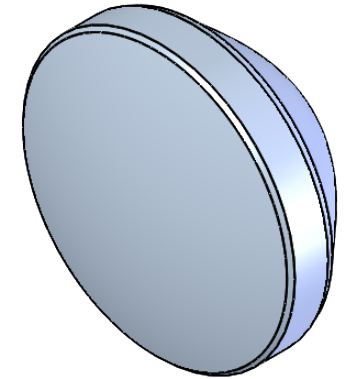
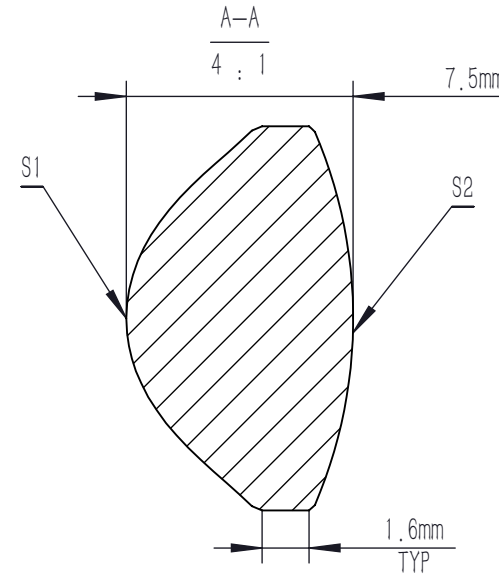


ASPHERIC COEFFICIENTS

	R	k	A4	A6	A8	A10	A12
S1	4.753124	-1.205071	5.3324183E-04	1.1162887E-05	-3.745566E-07	-7.6342017E-09	1.36022E-010
S2	-15.6494	-	-	-	-	-	-

ASPHERIC LENS EQUATION

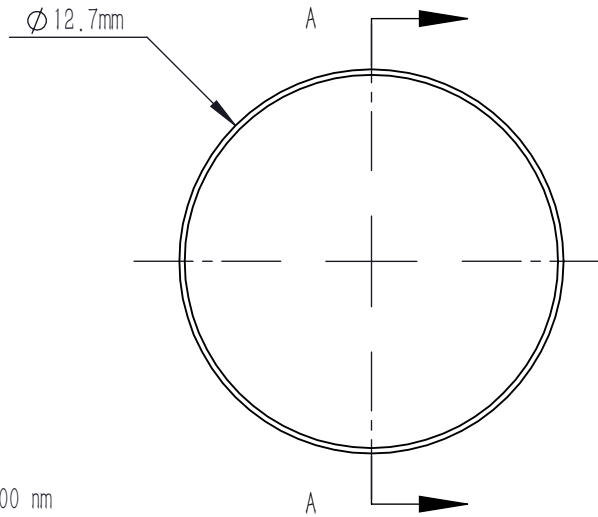

NOTES

- MATERIAL: B270
- DESIGN WAVELENGTH: 633.0 nm
- WORKING WAVELENGTH: 400 nm-700 nm
- NUMERICAL APERTURE: 0.78
- F/#: 0.70
- FOCAL LENGTH: 8.0 mm
- FOCAL LENGTH TOLERANCE: ±8%
- BACK FOCAL LENGTH(REF): bf=3.7 mm
- CLEAR APERTURE: >90%CA
- DIAMETER TOLERANCE: +0.0/-0.5 mm
- THICKNESS TOLERANCE: ±0.3 mm
- CHAMFER: 0.2 mm, 45°
- SURFACE QUALITY: 80-50 SCRATCH-DIG
- CENTRATION: <30 arcmin
- MAXIMUM TEMPERATURE: 250°C(482°F)
- AR COATING: Ravg<0.5%@400 nm-700 nm, 6° AOI

$$z = \frac{Y^2}{R(1 + \sqrt{1 - (1+k)Y^2/R^2})} + A_4Y^4 + A_6Y^6 + A_8Y^8 + A_{10}Y^{10} + A_{12}Y^{12}$$

DRAWING PROJECTION			<b>LBTEK</b>			
		NAME	DATE	AC4301-A		
DRAWN	BSHU	Aug./1st/24	Ø 12.7 mm, F=8.0 mm, NA=0.78 ASPHERIC CONDENSER LENS AR COATING 400-700 nm			
APPROVAL	WCHENG	Aug./1st/24	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES			B270	1.42g	5:1	A