

M6X0.25 ADJUSTER SCREWS
PROVIDES +/−5° TOTAL ANGULAR DISPLACEMENT
(0.32° PER REVOLUTION)
AND +/−3mm TOTAL TRANSLATION DISPLACEMENT
3 PLACES

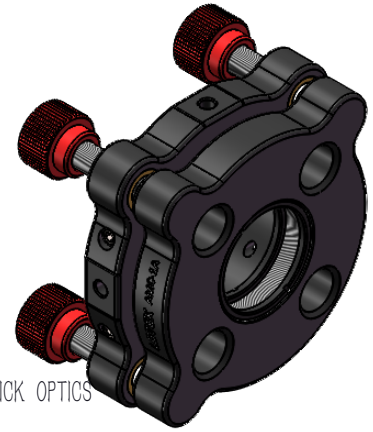

SM1 (1.035in−40) SERIES INTERNAL THREAD
ACCEPTS ∅25.4mm [1.00in] MAXIMUM 5.5mm[0.22in] THICK OPTICS
2 SM1R RETAINING RINGS INCLUDED
2.0mm [0.08in] THICK
∅23.0mm [0.90in] CLEAR APERTURE

M4X0.7 THROUGH TAPPED HOLE
3 PLACES

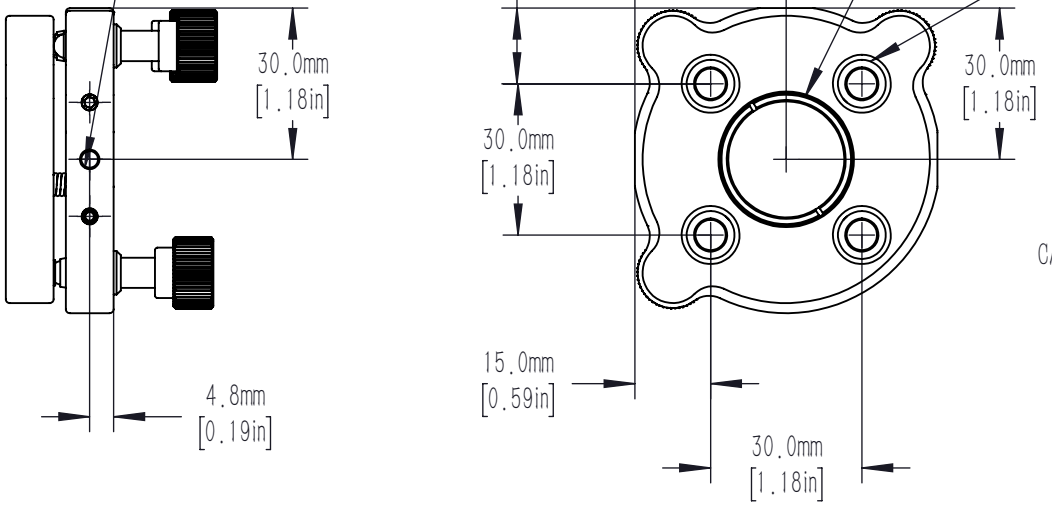

CAGE ROD CLEARNACE BORES
ALLOW FRONT PLATE
TO ASSEMBL INTO A CAGE SYSTEM

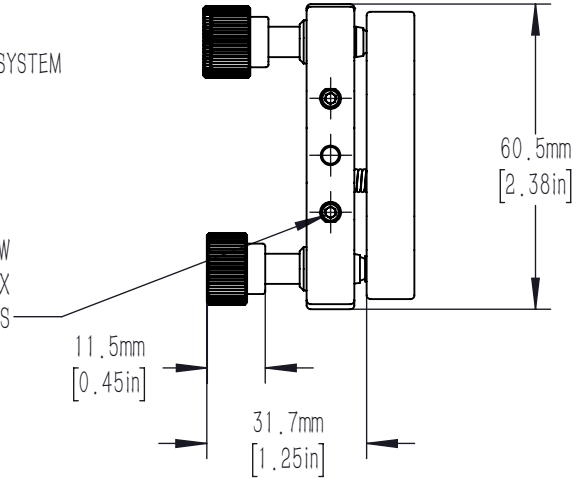

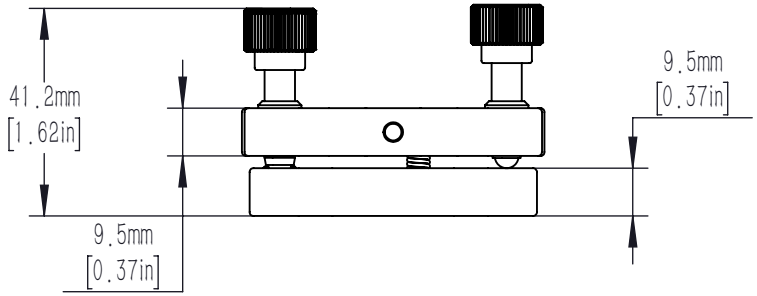

DRAWING PROJECTION			LBTEK			
	NAME	DATE	AMC−1A			
DRAWN	CZH	MAY./30th/23	30mm CAGE MIRROR MOUNT WITH SM1 THREAED FOR ϕ25.4mm OPTICS			
APPROVAL	ZXU	MAY./30th/23	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES			N/A	0.14 Kg	1:1.5	C