
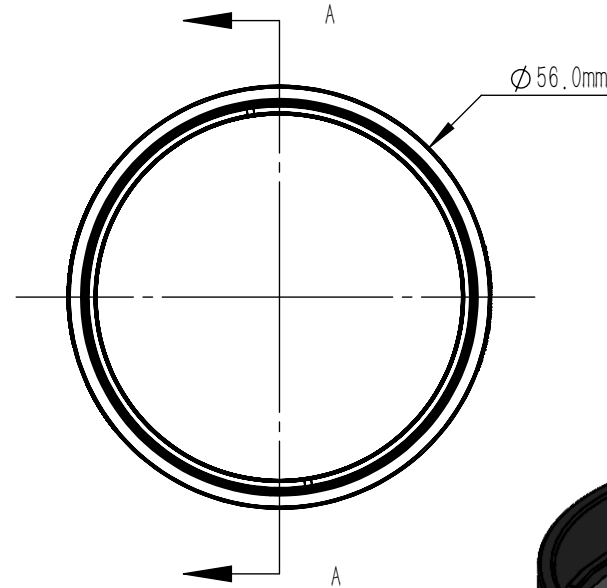


	R	k	A4	A6	A8	A10				
S1	31.075	-0.744	4.3665221e-07	-2.2713591e-10	-1.7042174e-13	-3.6809344e-17	8.9443459e-21	1.8501188e-23	-6.2704333e-27	
S2	∞	-	-	-	-	-	-	-	-	

$$Z = \frac{Y^2}{R(1 + \sqrt{1 - (1 + K)Y^2/R^2})} + A_4Y^4 + A_6Y^6 + A_8Y^8 + A_{10}Y^{10} + A_{12}Y^{12} + A_{14}Y^{14} + A_{16}Y^{16}$$

	Part Description	Material
①	MAC7807-A-EVA	ANODIZED ALUMINUM
②	SM2R	ANODIZED ALUMINUM
③	AC7807-A	S-LAH64

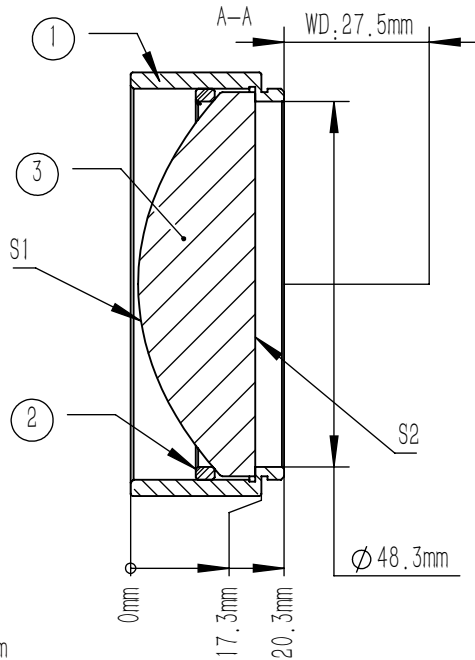

NOTES:

- DESIGN WAVELENGTH: 780.0 nm
- NUMERICAL APERTURE: 0.50
- FOCAL LENGTH: 40.0 mm ± 1 %
- BACK FOCAL LENGTH(REF): 31.3 mm
- CLEAR APERTURE: >90 %CA
- DIAMETER TOLERANCE: +0.0/-0.1 mm
- THICKNESS TOLERANCE: ±0.1 mm
- CHAMFER: 0.2 mm, 45 °
- WAVEFRONT ERROR(RMS): <0.5 μm
- SAG DEVIATION(POWER, S1): ±7.5 μm
- SURFACE IRREGULARITY(S1): <3 FRINGES
- SURFACE FLATNESS(S2): λ/4
- SURFACE QUALITY(S/D): 60/40
- CENTRATION: <3 arcmin
- DAMAGE THRESHOLD: 6 J/cm²@532 nm, 10 ns, 10 HZ, Ø0.345 mm
- AR COATING(S1, S2): Ravg<0.5 %@400-700 nm, 6° AOI

DRAWING PROJECTION			LBTEK			
	NAME	DATE				
DRAWN	SHAN	APR./19th/24	ASPHERIC LENS			
APPROVAL	WCHENG	APR./19th/24	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES			S-LAH64	32.64 g	1:1	B