



NUMBER	PART DESCRIPTION	MATERIAL
①	MECHANICAL HOUSING	BLACK ANODIZED ALUMINUM
②	BS1319-C	N-BK7

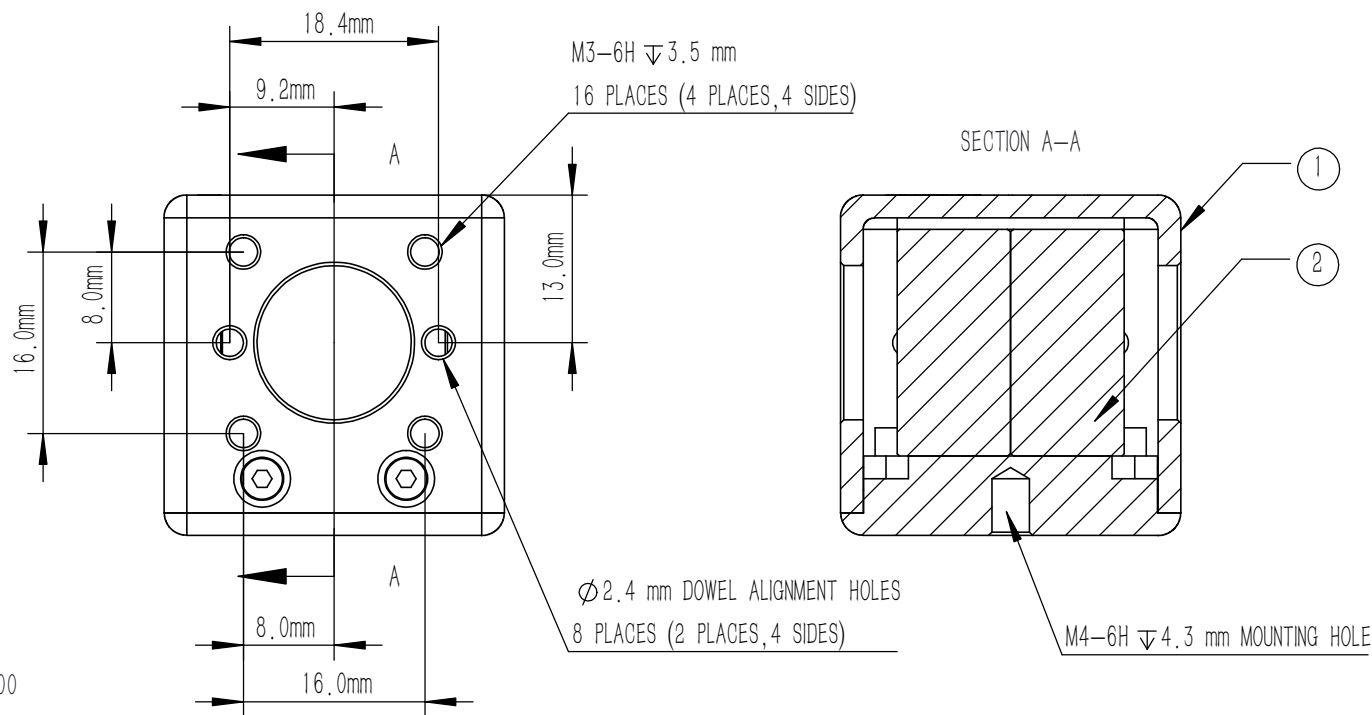

NOTES

BS1319-C:

- CLEAR APERTURE: $>80\%$ CA
- AR COATING (S1, S2, S3, S4) : $R_{avg} < 0.5\%$ @1100 nm-1600 nm (6° AOI, SINGLE SURFACE)
- ANGLE TOLERANCE: $\pm 5'$
- COATING (S5) : SPLITTING COATING
 $T_{abs} = (87 \pm 10)\%$, $R_{abs} = (7 + 10/-7)\%$;
 $|T_s - T_p| < 10\%$, $|R_s - R_p| < 10\%$; $T_{abs} + R_{abs} > 85\%$
- GLUED (S5, S6) : NOA61
- SPLIT RATIO (R:T) : 10:90
- TRANSMITTED BEAM DEVIATION: $0^\circ \pm 5\text{ arcmin}$
- REFLECTED BEAM DEVIATION: $90^\circ \pm 5\text{ arcmin}$
- SURFACE QUALITY (S1, S2, S3, S4) : 40/20 (S/D)
- WAVEFRONT ERROR(RMS): $\lambda/4@633\text{ nm}$
- SURFACE FLATNESS (S1, S2, S3, S4) : $\lambda/4@633\text{ nm}$
- OTHER SURFACES: FINE GROUND
- CHAMFER: 0.2 mm, 45°

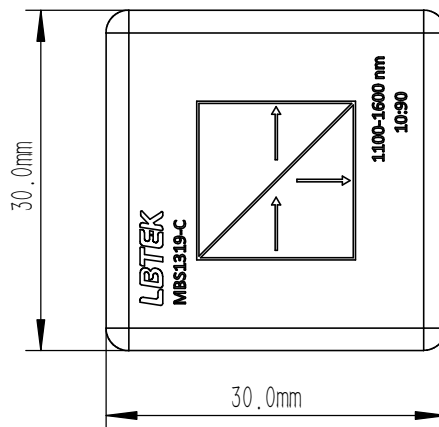

DRAWING PROJECTION				<h1 style="color: red; margin: 0;">LBTEK</h1>					
		NAME		DATE		MBS1319-C			
DRAWN		LZHOU		MAR./12th/24		BEAM SPLITTER L=20.0 mm, R:T=10:90@1100 nm-1600 nm			
APPROVAL		WCHENG		MAR./12th/24		MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES				6061-T6&N-BK7		49.1 g	3:2	A	