
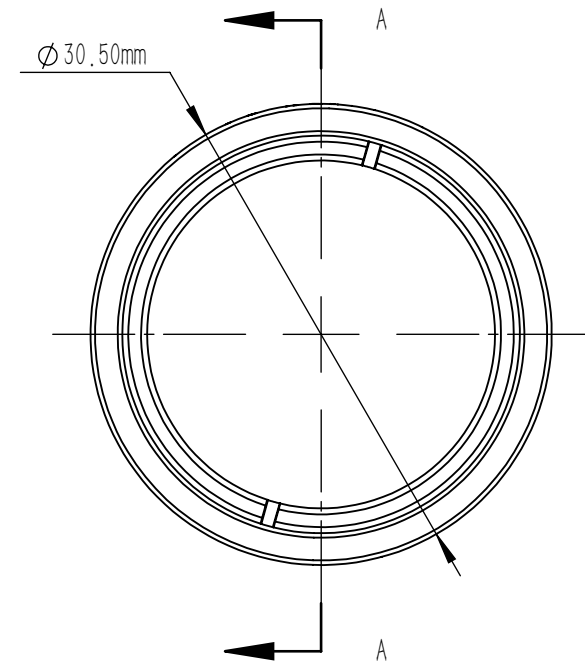


	PART DESCRIPTION	MATERIAL
①	SM1-8A	ANODIZED ALUMINIUM
②	NDFA10-10-NIR	ND FILTER GLASS
③	SM1R	ANODIZED ALUMINIUM

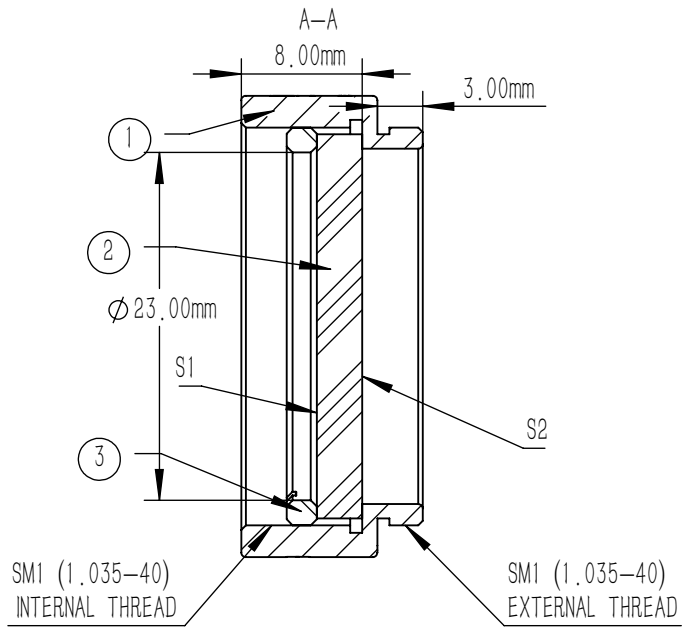

NOTES

1. OPERATION WAVELENGTH: 1.0-2.6 μm
2. OPTICAL DENSITY(OD): $OD_{\text{abs}}=1.0 \pm 5\% @ 1550 \text{ nm}$
 $OD_{\text{avg}}=1.0 \pm 5\% @ 1.0-2.6 \mu\text{m}$
3. CLEAR APERTURE: $>90\%CA$
4. COATING(S1, S2): Uncoated
5. SURFACE QUALITY(S1, S2): 40/20(S/D)
6. SURFACE FLATNESS(S1, S2): $PV < \lambda/4 @ 632.8 \text{ nm}$
7. PARALLELISM(S1, S2): $<10 \text{ arcsec}$
8. OTHER SURFACES: FINE GROUND

DRAWING PROJECTION			LBTEK			
NAME	DATE	MNDFA10-10-NIR				
DRAWN	LTAN	2025/5/30	ABSORPTIVE ND FILTER $\phi 25.4 \text{ mm}, OD=1.0 @ 1.0 \mu\text{m}-2.6 \mu\text{m}$			
APPROVAL	WCHENG	2025/5/30	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES			ND FILTER GLASS	10.0 g	2:1	A