





BACK VIEW

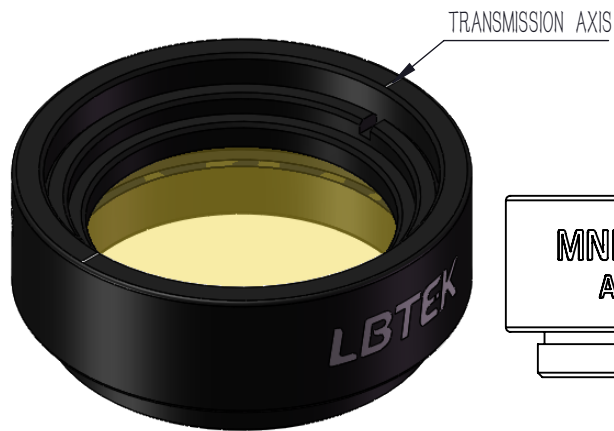


FRONT VIEW

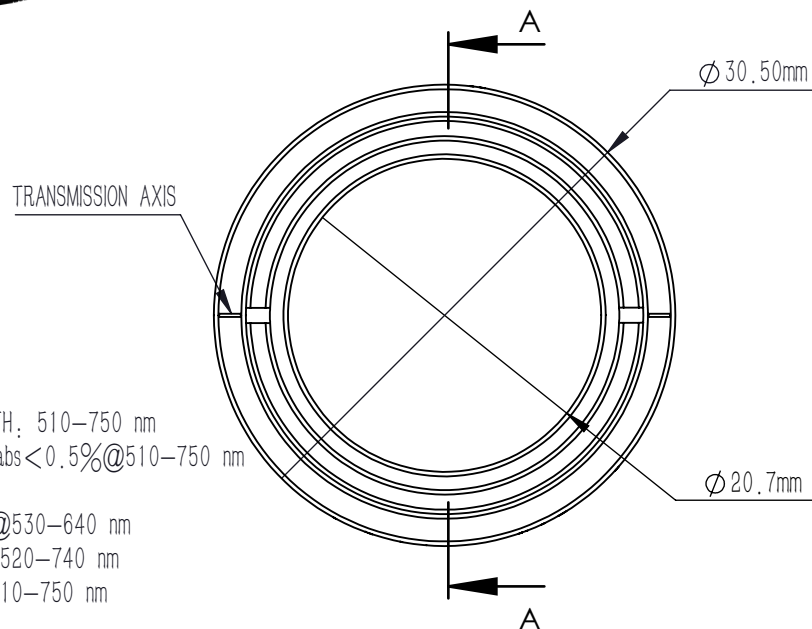

NOTES

1. OPERATION WAVELENGTH: 510–750 nm
2. AR COATING(S1, S2): $R_{\text{abs}} < 0.5\%$ @ 510–750 nm
3. EXTINCTION RATIO:
>100000:1 @ 530–640 nm
>10000:1 @ 520–740 nm
>1000:1 @ 510–750 nm
4. TRANSMITTANCE:
>66%–83% @ 530–640 nm
>63%–86% @ 520–740 nm
>58%–86% @ 510–750 nm
5. CLEAR APERTURE: >90%CA
6. WAVEFRONT ERROR($\varnothing 10$ mm): $< \lambda/4$ @ 633 nm
7. SURFACE QUALITY (S/D): 40/20
8. PARALLELISM: < 1 arcmin
9. ACCEPTANCE ANGLE: $\pm 20^\circ$
10. DAMAGE THRESHOLD:
CONTINUOUS BLOCK: 1 W/cm²
CONTINUOUS PASS: 5 W/cm²
11. OPERATING TEMPERATURE: -20°C TO $+120^\circ\text{C}$

NUMBER	PART DESCRIPTION	MATERIAL
①	MECHANICAL HOUSING	BLACK ANODIZED ALUMINUM
②	SM1RSF	BLACK ANODIZED ALUMINUM
③	POLARIZER	SILVER NANOPARTICLES & SODA LIME GLASS

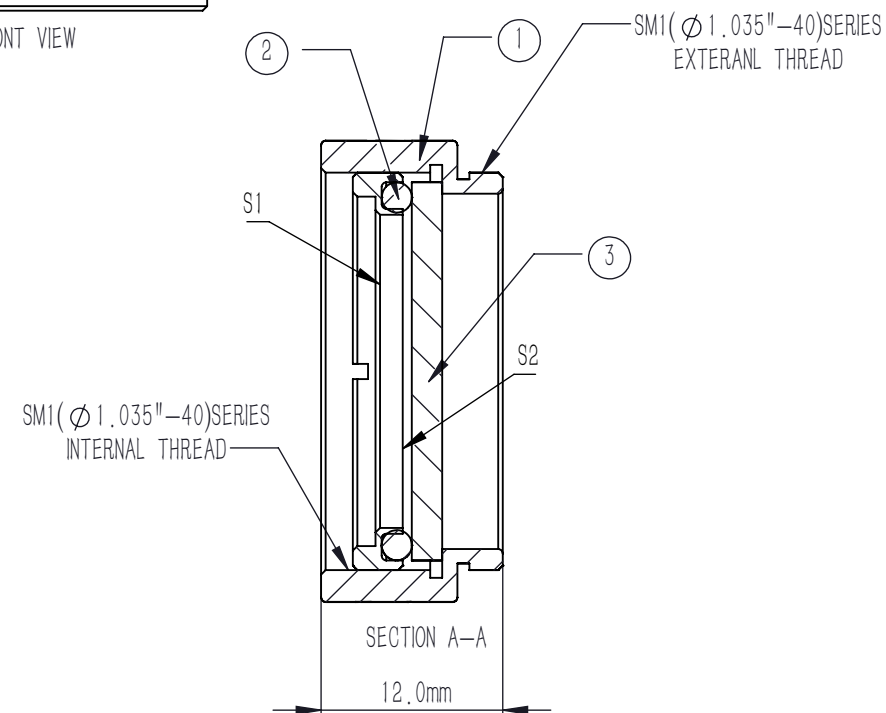

DRAWING PROJECTION			LBTEK			
	NAME	DATE	MNFLP25–VIS600–AR			
DRAWN	LTAN	May./15th/26	NANOPARTICLE LINEAR POLARIZER SM1 LENS TUBE, Ø 20.7 mm, 510 nm–750 nm			
APPROVAL	WCHENG	May./15th/26	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES			SILVER NANOPARTICLES & SODA LIME GLASS	9.05 g	2:1	A