




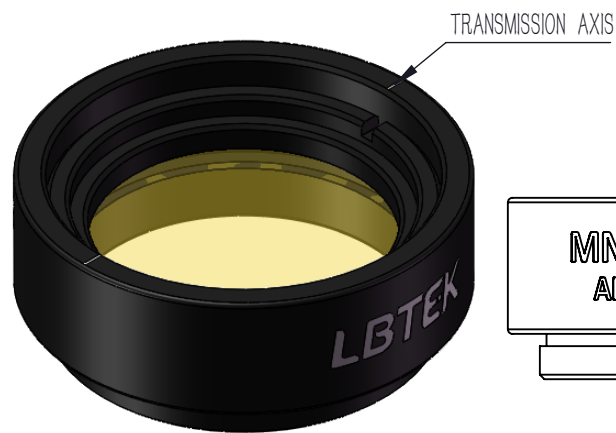

BACK VIEW

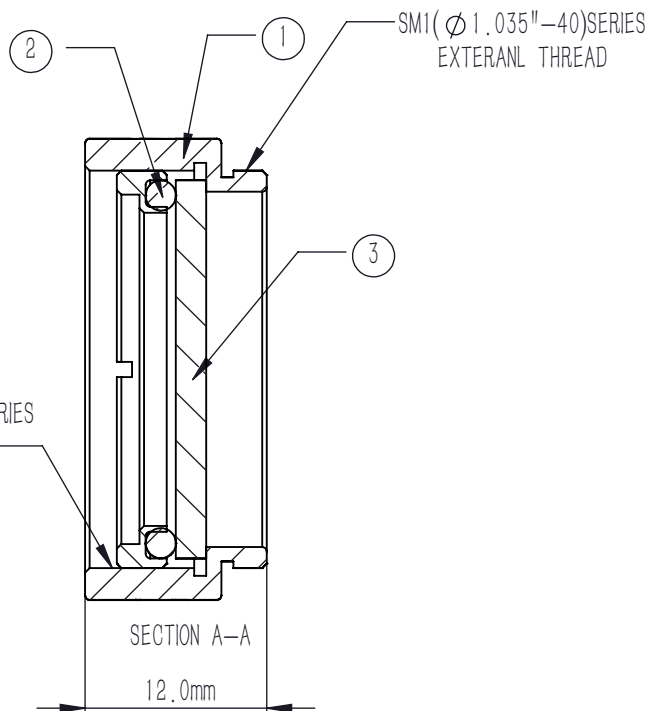


FRONT VIEW

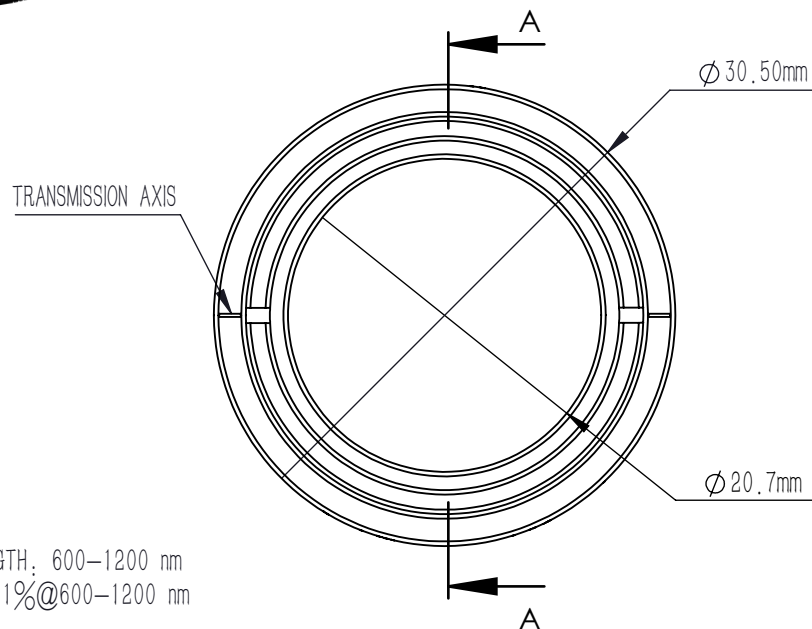

NOTES

1. OPERATION WAVELENGTH: 600-1200 nm
2. AR COATING: $R_{\text{abs}} < 1\%$ @ 600-1200 nm
3. EXTINCTION RATIO:
> 100000:1 @ 600-1200 nm
4. TRANSMITTANCE(UNCOATED):
> 71%-88% @ 600-1200 nm
5. CLEAR APERTURE: > 90% CA
6. WAVEFRONT ERROR($\varnothing 10$ mm): $< \lambda/4$ @ 633 nm
7. SURFACE QUALITY (S/D) : 40/20
8. PARALLELISM: < 1 arcmin
9. ACCEPTANCE ANGLE: $\pm 20^\circ$
10. DAMAGE THRESHOLD:
CONTINUOUS BLOCK: 1 W/cm²
CONTINUOUS PASS: 5 W/cm²
11. OPERATING TEMPERATURE: -20° C TO +120 ° C

NUMBER	PART DESCRIPTION	MATERIAL
①	MECHANICAL HOUSING	BLACK ANODIZED ALUMINUM
②	SM1RSF	BLACK ANODIZED ALUMINUM
③	POLARIZER	SILVER NANOPARTICLES & SODA LIME GLASS

DRAWING PROJECTION 			LBTEK			
	NAME	DATE	MNFLP25-VISIR-AR			
DRAWN	LTAN	May./15th/26	NANOPARTICLE LINEAR POLARIZER SM1 LENS TUBE, Ø 20.7 mm, 600 nm-1200 nm			
APPROVAL	WCHENG	May./15th/26	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES			SILVER NANOPARTICLES & SODA LIME GLASS	9.05 g	2:1	A