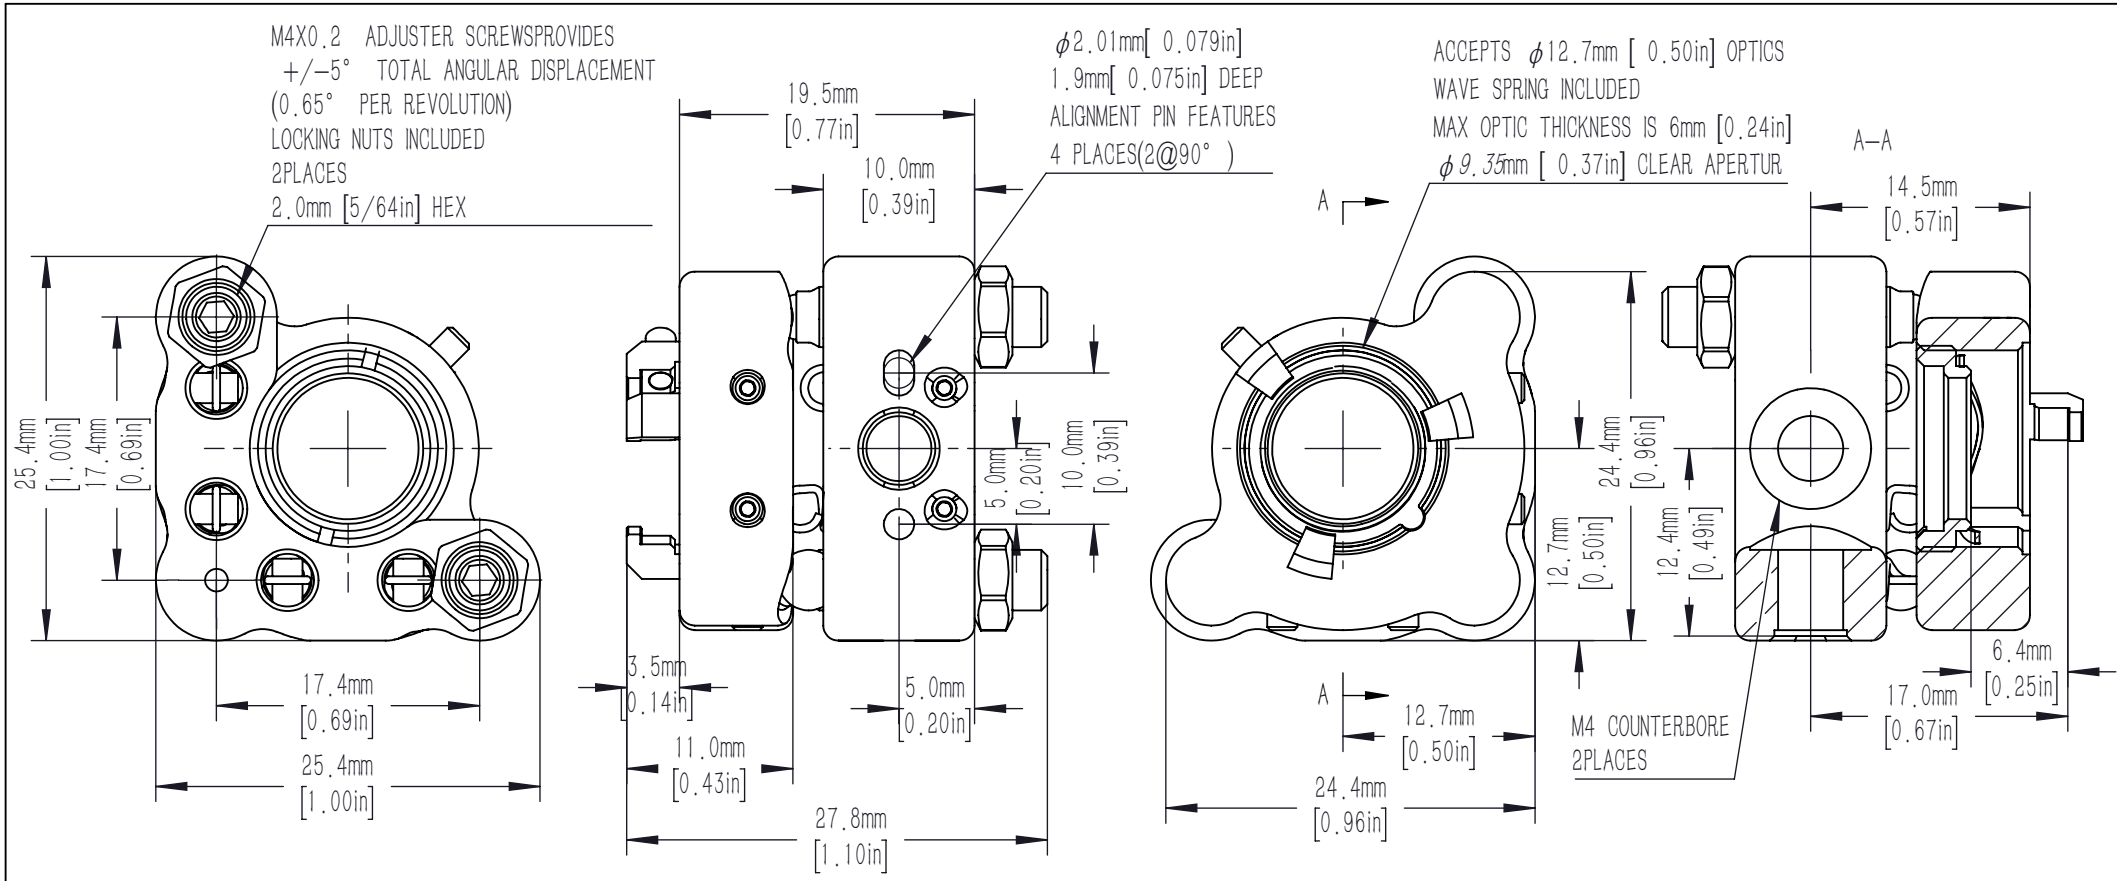

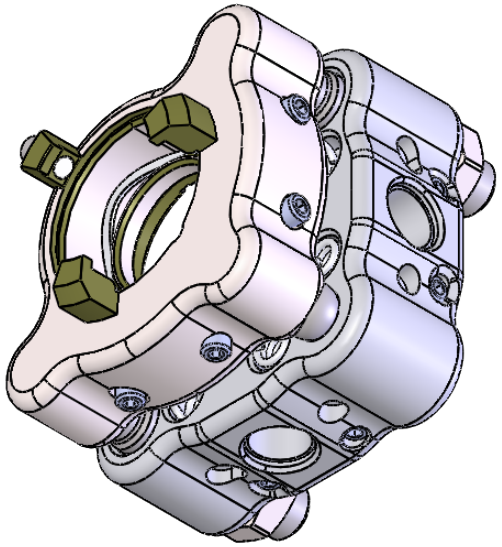

NOTE:
1) RECOMMENDED DOWEL PIN FOR ALIGNMENT PIN FEATURES IS A STANDARD 2mm DIN 7–m6 (ISO 2338) GROUND DOWEL PIN (2.002 mm TO 2.008 mm).
2) FOR A 2mm X 5mm PIN, WE RECOMMEND 0.0791in TO 0.0796in (2.01mm TO 2.02mm) X 0.185in±0.005in (4.7mm±0.13mm)
DEEP HOLES BE MADE INTO THE MATING SURFACE FOR THE MOUNT. THE SEPARATION OF THE HOLES IN RELATION TO THE MOUNTING HOLE LOCATION SHOULD HAVE A TOLERANCE OF 0.003in(0.08mm)

DRAWING PROJECTION			LBTEK			
	NAME	DATE	MT–AM05F2			
DRAWN	PCHEN	AUG./7th/25	MTHIGH STABILITY SERIES ϕ12.7mm LOW DISTORTION MIRROR MOUNT			
APPROVAL	YHLI	AUG./7th/25	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES			N/A	0.365 Kg	2:1	A