

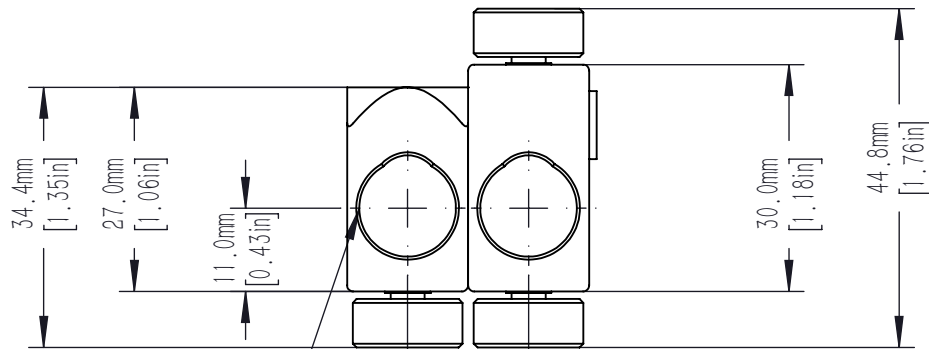
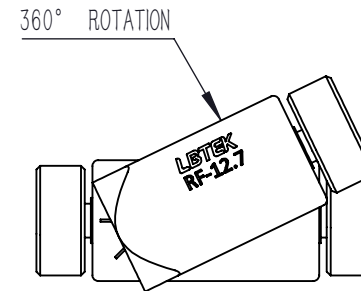


ϕ 14.5mm [0.57in] KNURLED THUMBSCREW
 FOR SECURING OF OP SERIES POSTS
 5.0mm [0.20in] HEX
 3 PLACES

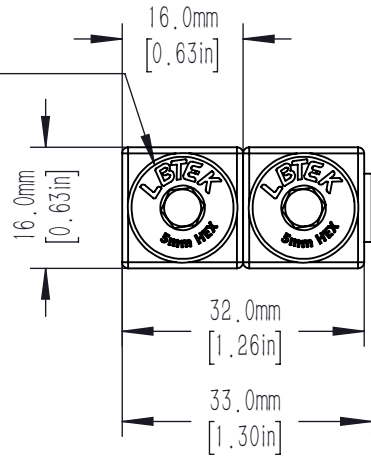

ϕ 12.8mm [0.50in] ACCEPTS
 STANDARD OP SERIES POSTS
 2 PLACES



DRAWING PROJECTION			LBTEK			
	NAME	DATE				
DRAWN	CZH	JUL./15th/21	ROTATING FIXTURE			
APPROVAL	YCH	JUL./15th/21	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES			N/A	0.052 Kg	1:1	B